



MENTRA


HOT-MELT EDGEBANDER
Model: MD 45S




Heated Fence




Buffing




Edging



Scraping



End trimming saws



Top & bottom trimming

- Hot melt glue tank
- Heavy-duty solid steel machine frame
- Top and bottom profile scrapers to provide smooth radius finish
- Heated fence to create a better bond

Available from

Proform

WWW.PROFORMNZ.COM



Control Panel

User friendly control panel with simple OFF/ON switches and digital reader to control glue temperature



Heated Fence

The Heated Fence to preheat the panel just before the glue is applied this feature creates a better bond of the tape to the panel



Glue Station

Hot Melt glue tank with 1 litre capacity and 3 pressure rollers



End Trimming Saws

The End Trimming unit has two independent motors fixed with saw blades for cutting the exceeding tape on the front and rear side of the panel




Top and Bottom Trimmers

The Top & Bottom trimmer units trim the tape on the top and bottom side of the panel. Each motor has tracing wheels fitted to ensure the best possible result is produced



Top and Bottom Scrapers

The Scrapers are radius and have tracing wheels fitted to ensure the best possible finish is produced

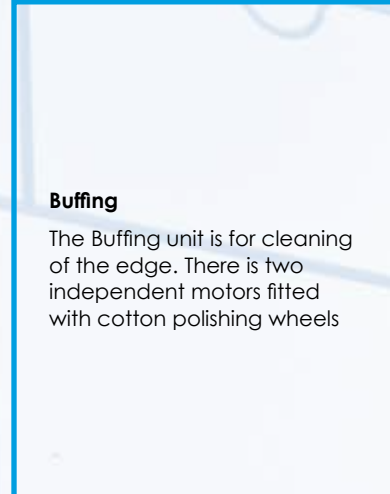

Buffing

The Buffing unit is for cleaning of the edge. There is two independent motors fitted with cotton polishing wheels



Technical Specifications

Minimum Panel Thickness	10mm	Radius scrapers	
Maximum Panel Thickness	45mm	Main Motor	1.5Kw
Minimum Panel Width	60mm	Air Pressure	0.7mpa
Minimum Panel Length	160mm	Net Weight	1000kg
Edge Tape Thickness	0.4 - 3mm	Dimensions	2900 x 800 x 1300
Maximum thickness of Timber	10mm	Power Supply	16 amps
Panel Feed Speeds	14m/min		
Glue Tank Capacity	1 Litre		
End Trimming Saws (2)	0.5Kw Each		
Top & Bottom Trimmers (2)	0.5Kw Each		

THE MANUFACTURER RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

68 Montgomery Crescent, PO Box 40-809, Upper Hutt, New Zealand
 PH 04 526 8589 FX 04 526 8580 EM proform@extra.co.nz

WWW.PROFORMNZ.COM